


# SINGLE POINT WATER GUN

✓ **REGULATES PRESSURE**  
✓ **ERGONOMIC DESIGN**

Industrialbatteries.com.au

5 YEAR WARRANTY

## BATTERY WATERING GUN

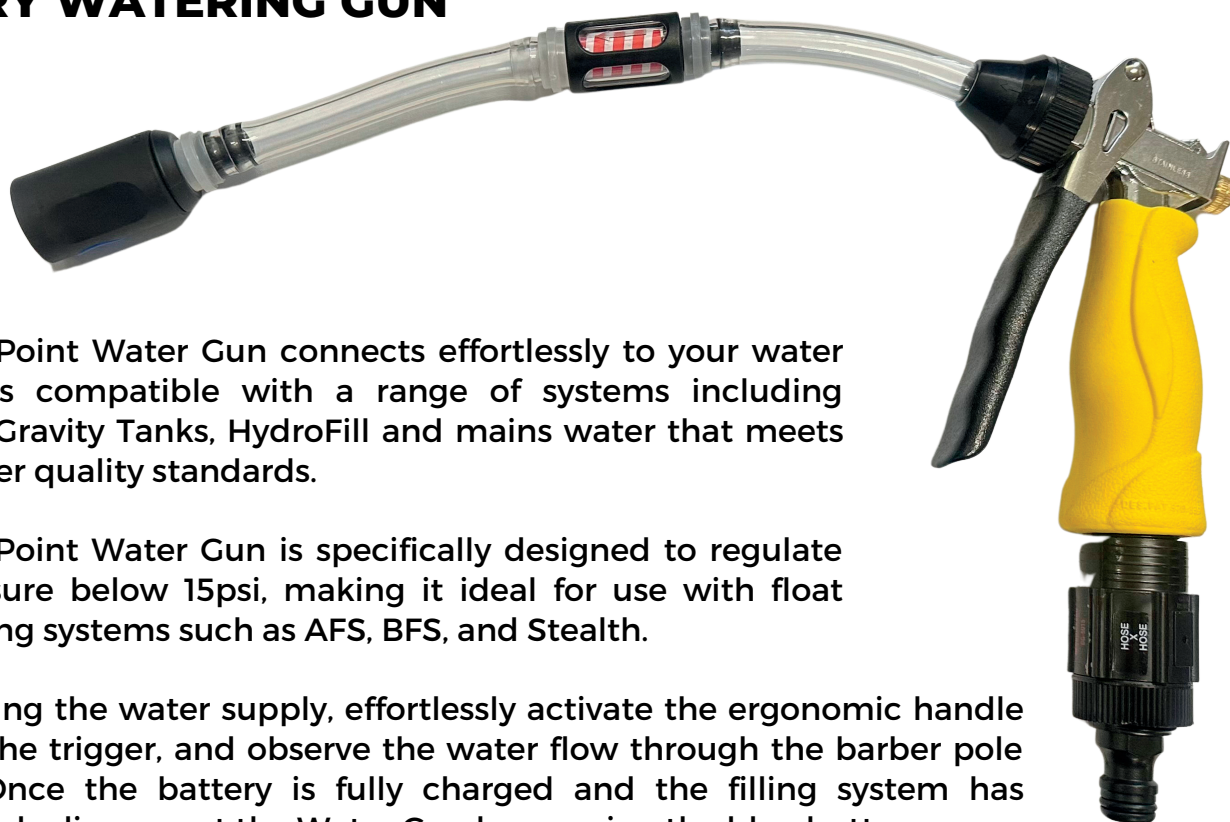

The Single Point Water Gun connects effortlessly to your water supply. It is compatible with a range of systems including Deionisers, Gravity Tanks, HydroFill and mains water that meets battery water quality standards.

The Single Point Water Gun is specifically designed to regulate water pressure below 15psi, making it ideal for use with float style watering systems such as AFS, BFS, and Stealth.

When utilising the water supply, effortlessly activate the ergonomic handle by pulling the trigger, and observe the water flow through the barber pole indicator. Once the battery is fully charged and the filling system has ceased, simply disconnect the Water Gun by pressing the blue button.

Crafted using the finest quality components to ensure superior durability and eliminating common issues such as cracks and water leakage that are often experienced with other connectors.


Ergonomic design of the handle and trigger operation provides optimal comfort and ease of use when connecting your hose.

For optimal performance, the low pressure connector such as the Single Point Water Gun should never be used with Water Injectors.

SYDNEY | BRISBANE | MELBOURNE | ADELAIDE | PERTH

     1300 877 531

**Industrial  
Batteries**  
Australia



**CELL**  
TRUSTED BATTERY SYSTEMS

# TECHNICAL INFORMATION

Industrialbatteries.com.au

## FEATURES

- Ergonomic pistol grip with the trigger on the 'right side'
- No trigger latch means **cannot** be filled without the operator
- Protected "Nipple Point" connection - **No break point**
- Tamper proof Push over Collets
- Generous tubing for easy access
- Higher PSI rating for quicker filling
- Stainless steel components
- Blue button disconnect for BFS, AFS and Stealth
- Highly visible water "Flow Wheel" Indicator
- **Design proven in battery rooms for over 30 years**

## SPECIFICATIONS

INPUT / OPERATING PRESSURE:	<100psi
PRESSURE REGULATOR:	15psi
SYSTEM EXPOSURE TEMPERATURE:	2 degrees to 71 degrees Celsius
WEIGHTS:	0.4kg
PRODUCT HEIGHT:	23.5cm
PRODUCT LENGTH:	38cm
PRODUCT WIDTH:	4.1cm
SHUT OFF:	Automatic Shut Off via SPWS

 **CALL OUR TEAM TODAY**

SYDNEY | BRISBANE | MELBOURNE | ADELAIDE | PERTH



**1300 877 531**

**Industrial  
Batteries**  
Australia

